

# Hawkesbury Afloat at BROOKLYN MARINA



Ph: 9985 7722

## 4 person Blue Tinnie - 8 hp Yamaha (2 stroke)

### STAFF - checklist before starting:

1. Ensure "Hirer" has a first aid kit and is on the correct boat – site contract
2. Ensure fuel hose is connected
3. Check fuel, cap is firmly closed on tank and breather is open
4. Squeeze fuel line - pump until firm
5. Ensure fuel line is not pinched.
6. Check life jacket numbers
7. Kids under 12 MUST wear one
8. Check RED cord, MUST be around wrist
9. Check anchor / rope



### How to stop:

Press the red button where shut-off cord is attached


### Emergency motor stop:

- \* Pull red chord from Switch
- \* Red chord MUST be around wrist




### How to tilt motor:

1. Ensure engine is off and in neutral
2. Tilt the motor up and push tilt support knob in.



### Shallow water drive:

1. Check engine is in neutral
2. Slightly lift up engine and push down shallow water lever

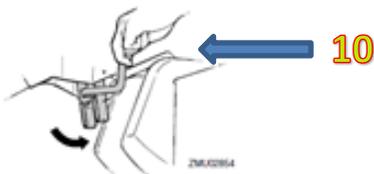

### Motor Components Diagram

1. Throttle arm
2. Gear shift
3. Choke knob
4. Shut-off cord switch
5. Start Pull Cord
6. Stop button
7. Tilt support knob
8. Cowling
9. Fuel hose connection
10. Shallow water drive (refer to Tilt instructions)



### SAFETY EQUIPMENT

- 4 x life jackets
- 1 x first aid kit
- 1 x bailing container
- 1 x paddle
- 1 x Torch (in kit)
- Air horn & flare (in kit)



### How to (drop) anchor:

1. Do not anchor under bridges or over sea grass beds or over submerged cables
2. Ensure rope is untangled then drop anchor overboard at bow
3. Wait for tension on rope, allow an extra metre or so of slack
4. Then tie off on the bow of boat

### How to lift anchor:

1. Have motor running & not in gear
2. Untie rope at bow and pull in rope
3. If you cannot pull in anchor because it is stuck you may have to cut the line and lose anchor and bond. OR - try and drive over anchor and this may dislodge the anchor from bottom. But you may risk getting anchor line caught in propeller and lose bond.

### Steering:


1. To steer left - move steering arm right
2. To steer right - push steering arm left
3. Speed is controlled by throttle arm

### Tips:


1. Do not reverse motors to slow down/stop
2. When docking and departing ensure all are seated
3. Read do's and don'ts on our Map
4. Avoid fishing fines (have a fishing licence) & don't keep undersized fish
5. If a big boat leaves large waves steer front-on into the waves slowly
6. DO NOT drive boat onto beaches
7. Motor will not start if throttle levers aren't in neutral
8. If you use the choke – only use it once or you will flood the motor
9. Ensure you have your mobile phone with you and it's charged – this number is on our

### How to start:


Place gear shift in neutral



Attach engine shut-off cord to operating wrist, ensure clip is secure in engine shut off switch



Align triangles on throttle



Pull manual starter handle . Ensure this is pulled straight and not to the side or it will fray and break the pull cord.



### OIL

- The motor is 2 stroke and oil is premixed by our staff

### Inventory Checklist

- 1 x 8hp outboard
- 1 x fuel tank and line
- 4 x life jackets (as required)
- 1 x paddle (in boat)
- 1 x anchor & line
- 1 x alu bimini frame with canvas cover
- 1 x bailing container (in boat)
- 1 x first aid kit
- Instruction signage